

Keep pressing the button until the LED is solid blue



Search for the '2WIRE' Wi-Fi network in your Wi-Fi networks and click on it

A screen opens.

Click on 'Configure Wifi'



Record (or remember) this IP address

Click on Annule (Niet save)

[OnePlus Nord Qt](#)

🔒 100%

[telenet-8C9DE](#)

🔒 100%

[MXCHIP\\_A8B1B6](#)

94%

[telenet-154B683](#)

🔒 20%

SSID telenet-8C9DE

Password exEGUXPM6jJu

IPadd LoWi 192 168 0 205 Port 8082

SUBNET 255 255 255 0

GATEWAY 192 168 0 1

save


Log back in on the house wifi network.

unplug the Lowi module and plug them back in so that the LED

no longer glows permanently blue (but flashes occasionally)


Open a browser and type the IP address in the address bar (in this example 192.168.0.205:8082)

A page will open, click on 'LOWI'

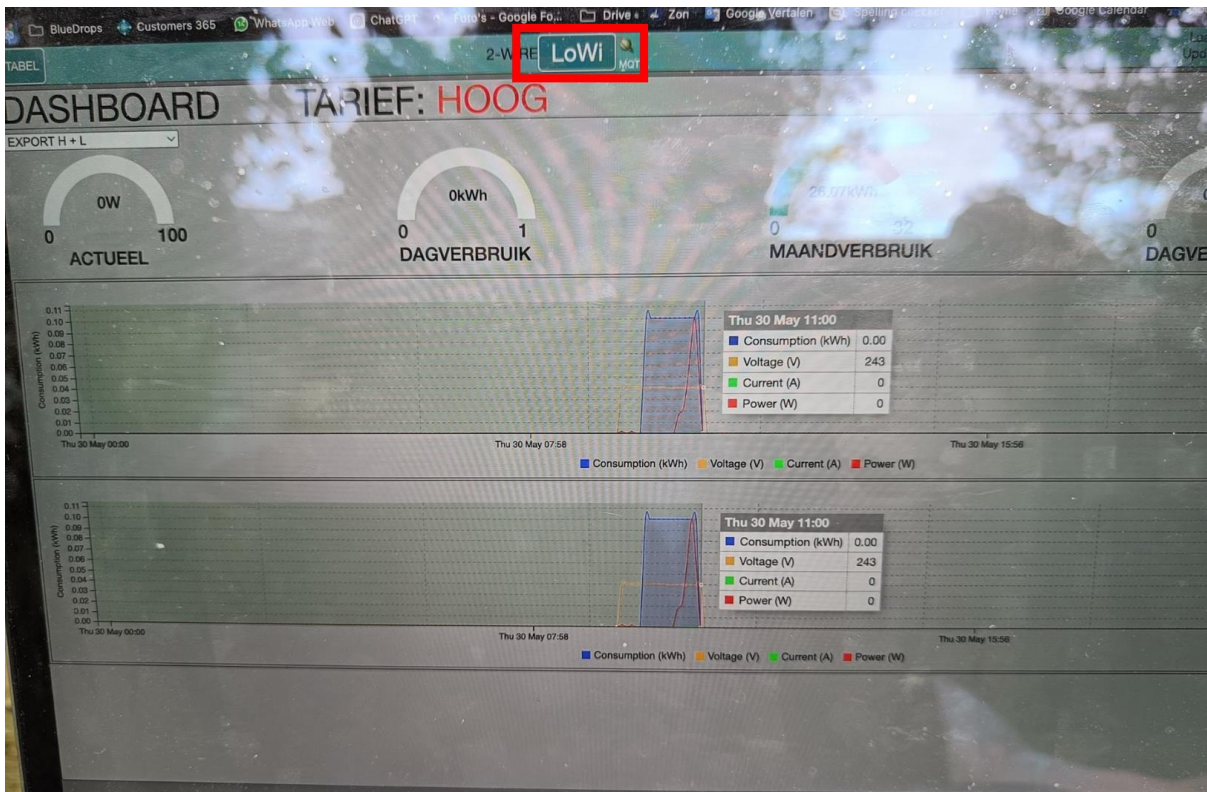

Click on 'Start' and enter the requested password adminLOWI

There will be an update of the LOWI to the latest version

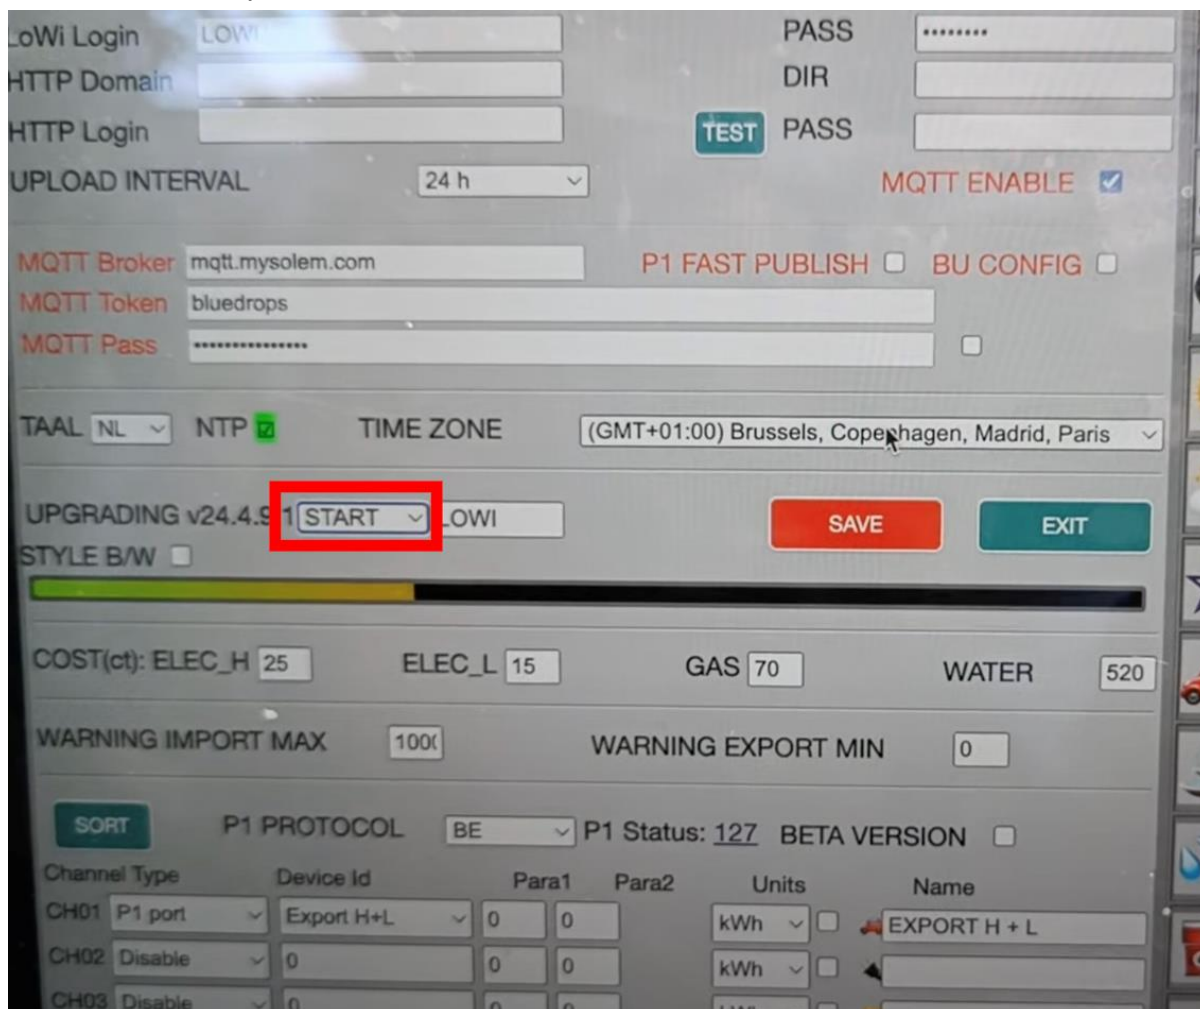

LOWi Login: LOWI  
PASS: .....

HTTP Domain:   
DIR:   
HTTP Login:   
TEST PASS:   
MQTT ENABLE:

MQTT Broker: mqtt.mysolem.com  
MQTT Token: bluedrops  
MQTT Pass: .....

TAAL: NL  
NTP:   
TIME ZONE: (GMT+01:00) Brussels, Copenhagen, Madrid, Paris

UPGRADING v24.4.9: 1 START LOWI  
SAVE EXIT

COST(ct): ELEC\_H: 25 ELEC\_L: 15 GAS: 70 WATER: 520  
WARNING IMPORT MAX: 100 WARNING EXPORT MIN: 0

Sort P1 PROTOCOL: BE P1 Status: 127 BETA VERSION:

Channel	Type	Device Id	Para1	Para2	Units	Name
CH01	P1 port	Export H+L	0	0	kWh	EXPORT H + L
CH02	Disable	0	0	0	kWh	
CH03	Disable	0	0	0	kWh	

Then check 'Beta Version' and click on start (adminLOWI as password)

IP 192.168.129.1    PORT 8082    RSSI -76dBm  
MAC 7c:87:ce:a1:4b:4e    METER ID: 1SAG3105064698

LoWi Login: LOWI    PASS: .....

HTTP Domain:    DIR:    TEST PASS

HTTP Login:    MQTT ENABLE

UPLOAD INTERVAL: 24 h

MQTT Broker: mqtt.mysolem.com    P1 FAST PUBLISH     BU CONFIG

MQTT Token: bluedrops

MQTT Pass: .....

TAAL: NL    NTP     TIME ZONE: (GMT+01:00) Brussels, Copenhagen, Madrid, Paris

UPGRADING v24.5.27: **START** BETA    SAVE    EXIT

STYLE B/W

COST(ct): ELEC\_H 25    ELEC\_L 15    GAS 70    WATER 520

WARNING IMPORT MAX: 1000    WARNING EXPORT MIN: 0

  P1 PROTOCOL: BE    P1 Status: 127    BETA VERSION

Click on 'Save' (adminLOWI as password)